

A Conservation Tool



Available in 20'
to 62' Widths

STERLING FGR-6600 FLEX GANG ROLLING CONDITIONER

FGR-6636 - 36',
3 Section Shown



**Preparing the Perfect Seed Bed
Vital for more Profitable Harvests**

**Breaks Clods • Firms Soil for Better Soil to Seed Contact
Saves Valuable Moisture • Improves Consistent Planting Depth**

Great Grower Benefits ...

Earlier, Consistent Emergence

Healthier More Vigorous Plant Growth


Enhanced Root Development

Better Pasture and Higher Yields



STERLING



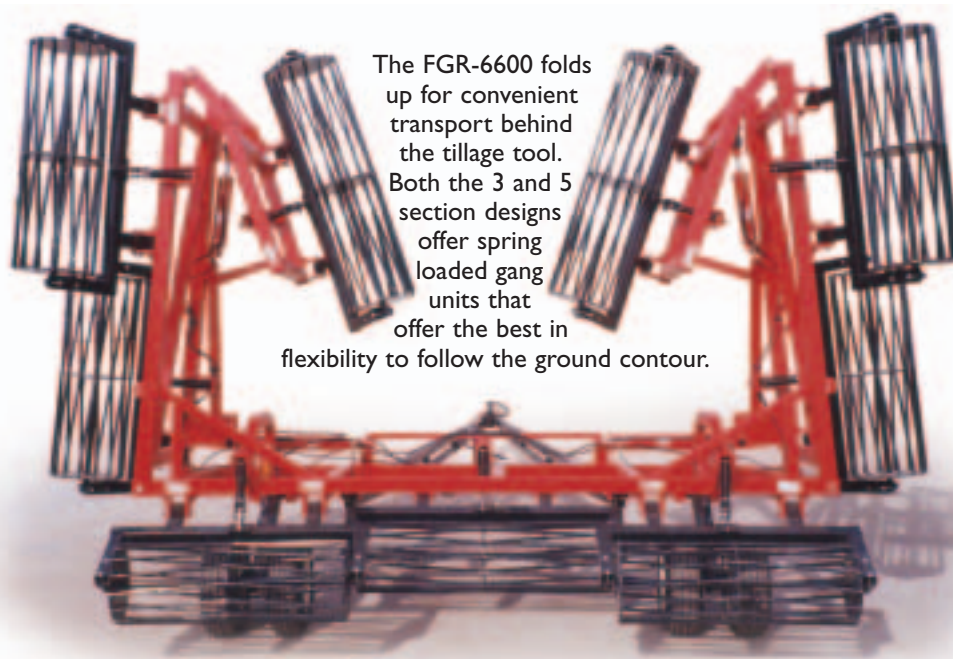

The FGR-6600 folds up for convenient transport behind the tillage tool. Both the 3 and 5 section designs offer spring loaded gang units that offer the best in flexibility to follow the ground contour.



These units are designed to pull behind primary or secondary tillage tools, which is the optimum time to condition the soil. All tongues are long enough to allow for turns without interference with tillage tools.



Each rolling conditioner unit is 20" in diameter with 14 - 1" diameter rods on 1/2" bulkheads, rolling on 1 3/4" pillow block bearings.

Sterling Model 6600 "Flex Gang" Rolling Conditioner

Model	Conditioning Width	Transport Width	Approx. Weight
3 Section			
FGR-6620	20'	18'	5210
FGR-6622.5	22' 6"	18'	5600
FGR-6625	24' 10"	18'	5950
FGR-6627	27' 2"	18'	6495
FGR-6630	30' 8"	18'	6850
FGR-6632	31' 10"	18'	7260
FGR-6634	34' 2"	18'	7670
FGR-6636	36' 8"	18'	8120
FGR-6638	38'	20' 8"	8520

Model	Conditioning Width	Transport Width	Approx. Weight
5 Section			
FGR-6642	42'	20' 8"	8850
FGR-6644	44' 2"	20' 8"	9180
FGR-6646	46' 2"	20' 8"	9500
FGR-6649	49' 8"	20' 8"	9810
FGR-6652	53' 4"	22' 10"	10400
FGR-6662	61' 10"	26' 4"	11320

Other sizes and models are available—contact your local dealer or Sterling Farm Supply for details.

As we are continually striving to improve our products and available equipment, specifications are subject to change without notice.

Note: These models weigh approx. 220 lbs. per foot



Manufactured by

STERLING FARM SUPPLY, INC.

330 S. Broadway, Sterling, KS 67579
(620) 278-2579 / 800 864-4503

Your dealer is

