


A Conservation Tool



Available in 34'
to 62' Widths

STERLING 6600 FIVE SECTION FLEX GANG PACKER

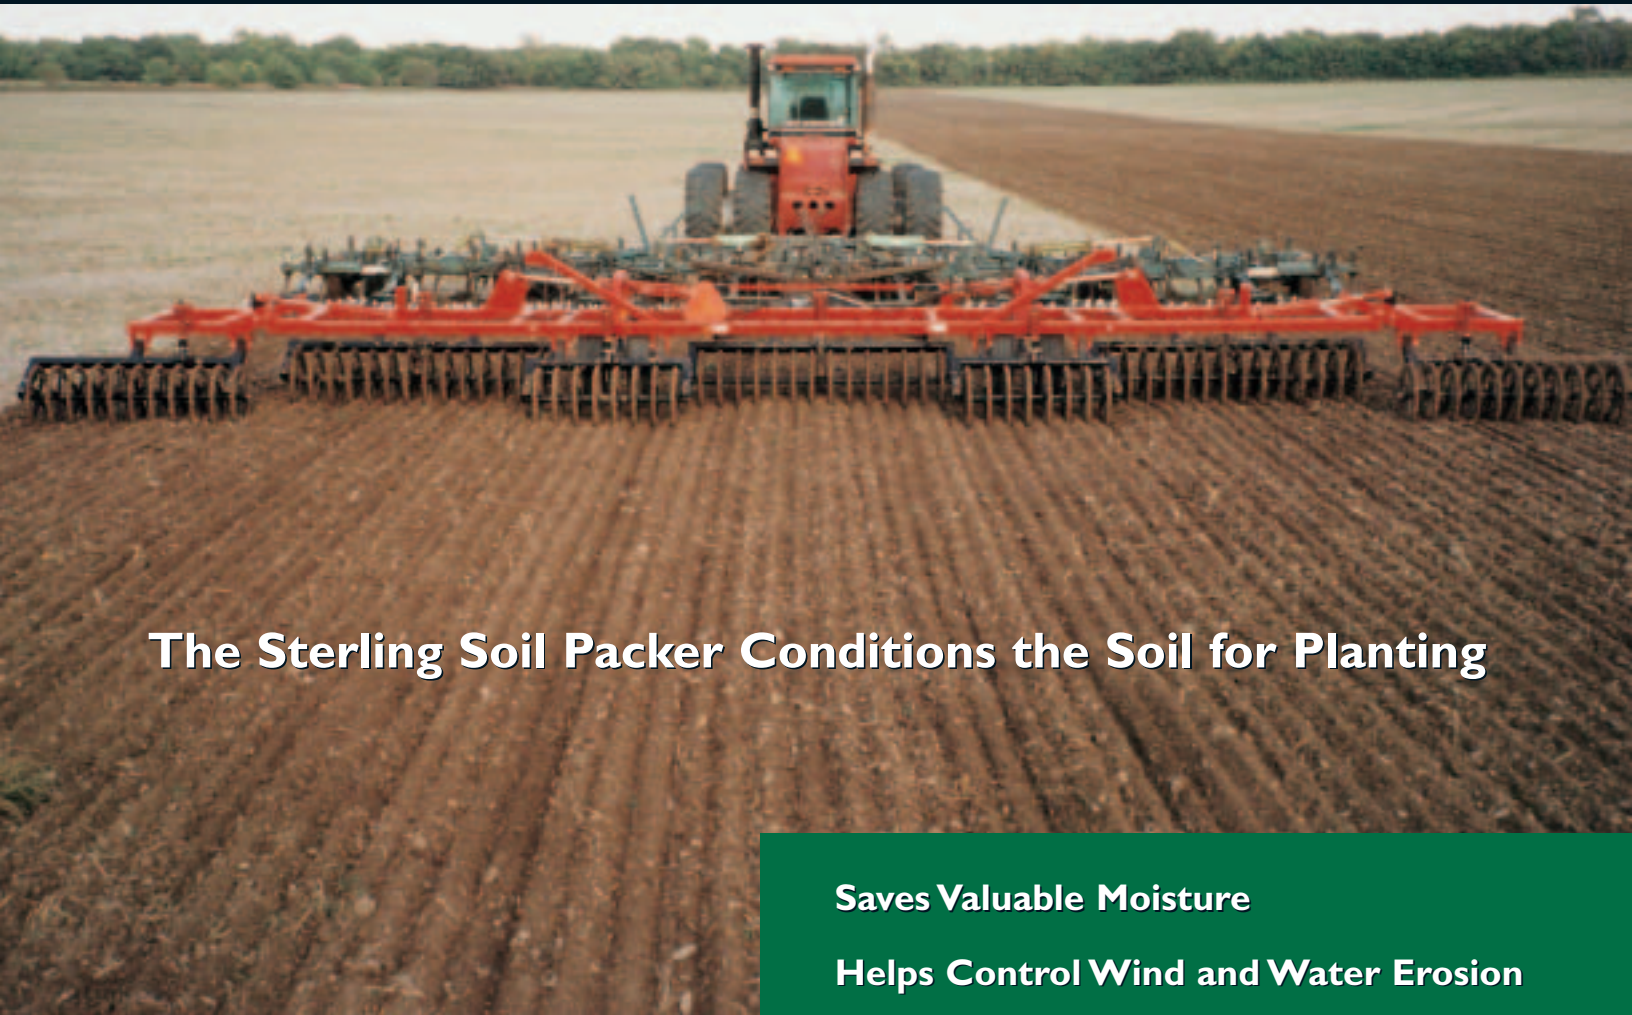

The Sterling Soil Packer Conditions the Soil for Planting

Saves Valuable Moisture

Helps Control Wind and Water Erosion

Firms Up Seed Bed

Breaks Clods



STERLING





This FG6600 folds up for convenient transport behind tillage tool. The 5 section design plus the spring-loaded gang units offer the most flexible packer to follow ground contour of any packer on the market today!



A 20' tongue allows end row turns without interference with tillage tools.

Planting seed in moist soil, at proper depths, with good soil to seed contact and proper soil coverage over seed will result in improved germination, earlier and even emergence and over all healthier plants throughout growing season.

Mud bars to prevent plugging in wet conditions are an option.

Note: These models weigh approx. 250 lbs. per foot

Sterling 6600 Five Section Flex Gang Packer

Model	Wheels	Packing Width	Transport Width	Approx. Weight
FG-6634	58	33' 10"	21' 2"	8900
FG-6640	70	40' 10"	21' 2"	10740
FG-6644	74	43' 2"	21' 2"	11108
FG-6646	78	45' 6"	21' 2"	11676
FG-6649	84	49' 0"	21' 2"	12207
FG-6652	90	52' 6"	23' 6"	13080
FG-6662	106	61' 10"	23' 6"	14680

Other sizes and models are available—contact your local dealer or Sterling Farm Supply for details.

As we are continually striving to improve our products and available equipment, specifications are subject to change without notice.

Your dealer is



Each individual gang features the 24" diameter Sterling Packer Wheel (68# ea.) mounted on 1 1/2" shaft at 7" spacing. This firms soil between wheels yet allows a ridge to help prevent wind and water erosion, saves moisture and makes a firm seed bed. **This ridge does not cause uneven seed depth by the planting equipment.**



Manufactured by

STERLING FARM SUPPLY, INC.

330 S. Broadway, Sterling, KS 67579
 (620) 278-2579 / 800 864-4503
www.sterlingfarmsupply.com